



PROJECT :	SET INCLUDES : System M+ (M42+) : Class G Rectangular Floor Plate, Adjustable / Finish : stainless steel Cable Grommet Top Pivot, ≥91mm Backset, Class G for 15mm spindle Ceiling Plate : Class G (15mm spindle) / Finish : stainless steel Mounting Kit : epoxy, hex keys, floor template, adjustment card All Fasteners	
OPENING ID :		
SPECIFIER :		
ISSUE DATE :		
NOTES :	BUY NOW	SET CODE : ST.M+.CG.G.S.SS
CONTACT : BETTER BUILDING HARDWARE +1-888-636-1627 sales@betterbuildinghardware.com		CSI DIVISION : 08

Ceiling Plate : Class G


Component ID : CP.X.X.G.S.SS

dimensions in mm



Top Pivot : TP-CG

Component ID : TP.X.CG.G.X.XX

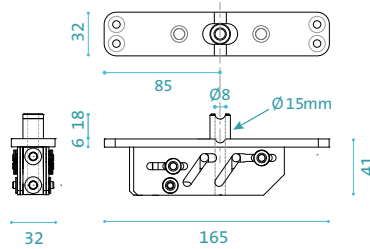

System M+ (M42+) : Class G

FEATURES :

- Dual-acting pivot and closer
- Hold positions at ±90° and 0°
- Closing to 0° from ±90° and ±125°
- Minimum pivot point backset : 3-9/16" (91mm)
- Minimum door thickness : 2" (50mm)
- Virtually no door width or height limit
- 2 Weight Classes for doors up to 1100lbs.
- Adjustable Damper Control and Backcheck
- Adjustable 30° Speed Control
- Adjustable Latching Speed Control
- Axial/Plumb Adjustment ±5mm side-to-side
- Cable Grommet top spindle for power transfer
- EN 1670 - Class 5 Corrosion Resistance
- Maintenance-free
- Suitable for all door/frame materials

Bottom Pivot : Class G

Component ID : BP.M+.70.G.X.XX

Resources


DOWNLOADS




CONFIGURE YOUR PIVOT
FritsJurgens Selector [▶](#)

System M+


Three Speed Adjustments



BACKCHECK/DAMPER



30° SPEED



LATCHING SPEED

Floor Plate : Rectangular

Component ID : FP.M.X.X.S.SS

